



# PORTABLE MOTOR PUMPS WITHOUT VACUUM

- EXTREMELY EASY TO USE
- LIGHT AND EASY TO CARRY
- PUMPING PROCESS STARTS WITHIN SECONDS OF IMMERSION
- WORKS WITHOUT VACUUM WITH PATENTED TECHNOLOGY
- OVERCOMES UP TO 10 METERS HEIGHT DIFFERENCE
- APPLICATION ALSO IN POLLUTED WATER
- OPERATION ALSO POSSIBLE WITHOUT WATER WITHOUT DAMAGE
- DOES NOT REQUIRE ADDITIONAL SYSTEMS

A DIVISION OF **VOGT-CTE GMBH**  
**RESCUETECHNOLOGY DISTRIBUTION**



## P2 GASOLINE PUMP

ENGINE TYPE - **4 CYCLE**

NUMBER OF ENGINE CYLINDER - **2 CYLINDER**

COOLING SYSTEM - **AIR COOLED**

ENGINE BORE x STROKE - **86,00 x 79,00 mm**

PISTON DISPLACEMENT - **993 cc**

ENGINE OUTPUT - **27,6 Kw - 37 HP / 29,8 kW - 40 HP**

ENGINE FUEL TYPE - **GASOLINE**

ENGINE FUEL TANK CAPACITY - **20 LT**

ENGINE FUEL CONSUMPTION - **8 LT/HR (FULL STROKE)**

ENGINE FUEL SYSTEM - **ELECTRONIC FUEL INJECTION**

ENGINE OIL TANK CAPACITY - **2,3 LT**

ENGINE STARTING - **ELECTRIC**

PUMP SUCTION SYSTEM - **MECHANIC PATENTED SUCTION**

PUMP TYPE - **SINGLE STAGE CENTRIFUGAL P.**

PUMP SUCTION TYPE AND DIA - **STORZ - 4"**

PUMP DISCHARGE - **STORZ - 2,5" (OPTIONAL 2,5" BS, GOST, NH)**

PUMP DISCHARGE NUMBER - **TWIN OUTLET**

PUMP DISCHARGE VALVE - **BALL VALVE**

PUMP BEARING OIL CAPACITY - **150 ml**

DRY WEIGHT - **105 KG**

READY TO WORK WEIGHT - **135 KG**

OVERALL DIMENSION (mm) - **600 x 850 x 750**

### Performance At Suction Height 6m



**1500** Lt/min | **(2 Bar)**



**1200** Lt/min | **(3 Bar)**



**1000** Lt/min | **(4 Bar)**



**800** Lt/min | **(5 Bar)**




**400** Lt/min | **(6 Bar)**



# P1 DIESEL PUMP

- ENGINE TYPE - **4 CYCLE**
- NUMBER OF ENGINE CYLINDER - **2 CYLINDER**
- COOLING SYSTEM - **AIR COOLED**
- ENGINE BORE x STROKE - **90,00 x 75,00 mm**
- PISTON DISPLACEMENT - **954 cc**
- ENGINE OUTPUT - **17 Kw – 23 HP**
- ENGINE FUEL TYPE - **DIESEL**
- ENGINE FUEL TANK CAPACITY - **6 LT**
- ENGINE FUEL CONSUMPTION - **4 LT/HR (FULL STROKE)**
- ENGINE FUEL SYSTEM - **DIRECT FUEL INJECTION**
- ENGINE OIL TANK CAPACITY - **3.0 LT**
- ENGINE STARTING - **ELECTRIC**
- PUMP SUCTION SYSTEM - **MECHANIC PATENTED SUCTION**
- PUMP TYPE - **SINGLE STAGE CENTRIFUGAL P.**
- PUMP SUCTION TYPE AND DIA - **STORZ - 4"**
- PUMP DISCHARGE - **STORZ – 2,5" (OPTIONAL 2,5" BS, GOST, NH)**
- PUMP DISCHARGE NUMBER - **TWIN OUTLET**
- PUMP DISCHARGE VALVE - **BALL VALVE**
- PUMP BEARING OIL CAPACITY - **150 ml**
- DRY WEIGHT - **125 KG**
- READY TO WORK WEIGHT - **145 KG**
- OVERALL DIMENSION (mm) - **600 x 850 x 750**

## Performance At Suction Height 6m

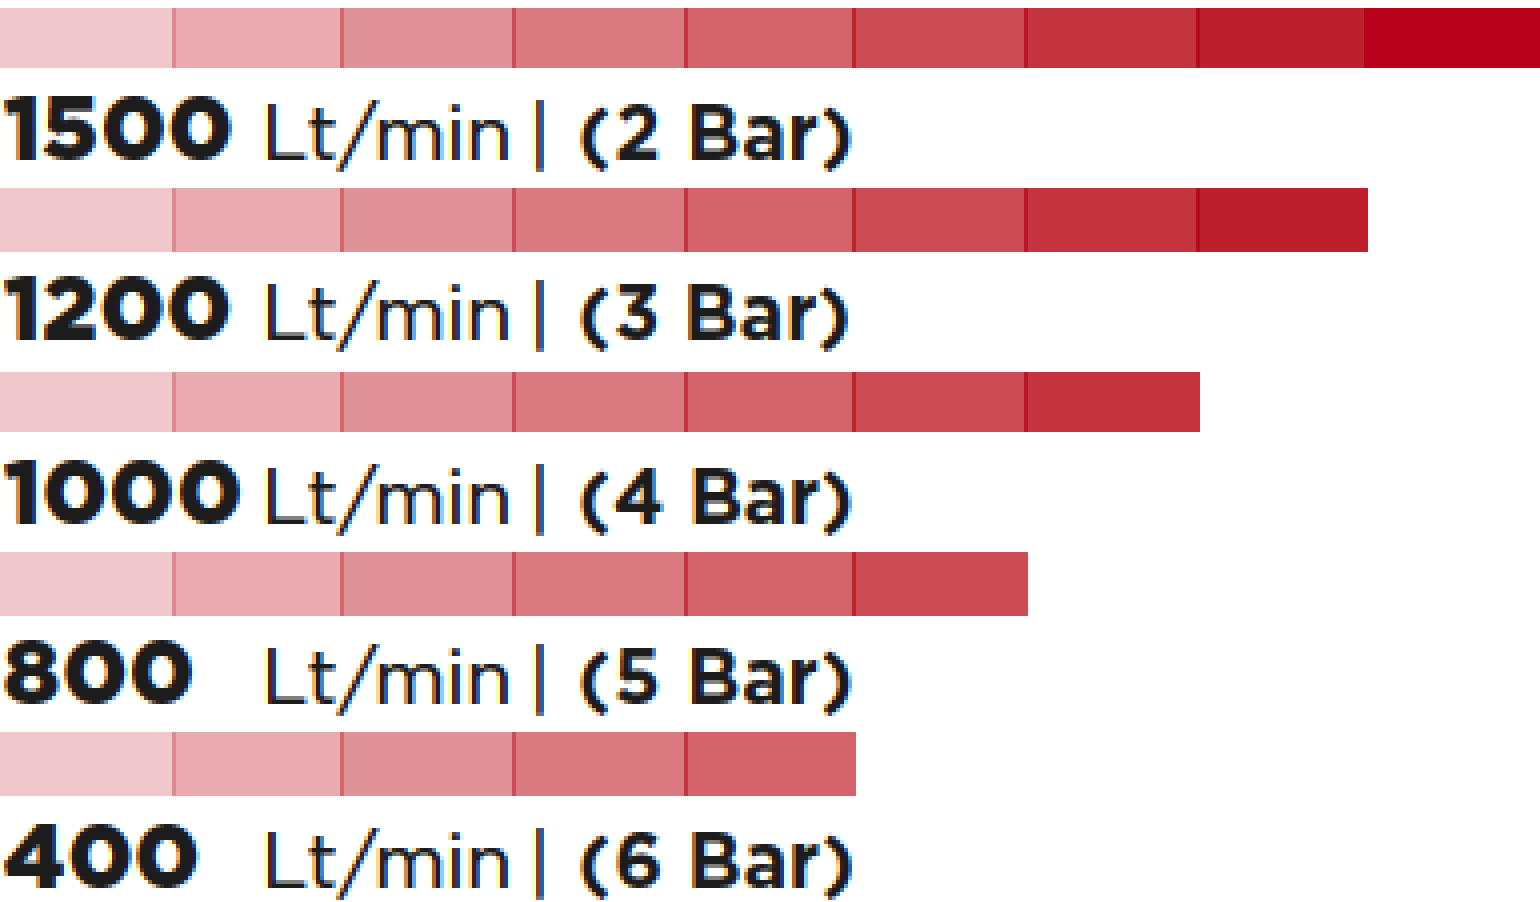



Presented by your **KubePompa** partner for **England / Ireland / Scotland**

---

**Angloco Ltd**  
**Station Road**  
**Batley, West Yorkshire**  
**WF17 5TA**

Tel: +44 (0)1924 441 212

Fax: +44 (0)1924 233 895

Email: [sales@angloco.co.uk](mailto:sales@angloco.co.uk)

Web: [www.angloco.co.uk](http://www.angloco.co.uk)

**Import Europe**

Vogt-CTE GmbH

Erlenauweg 17

CH-3110 Münsingen

Ph +41 33 223 72 12

[info@vogt-cte.com](mailto:info@vogt-cte.com)

[www.vogt-cte.com](http://www.vogt-cte.com)

[www.linkedin.com/company/vogt-cte-gmbh](http://www.linkedin.com/company/vogt-cte-gmbh)